

medartis®

PRECISION IN FIXATION

PRODUCT INFORMATION

Distal Ulna Plates 2.5

APTUS®
Wrist

Distal Ulna Plates 2.5

Stable fixation of intra- and extra-articular fractures of the head and neck of the distal ulna

The ulnar head is the centre of rotation for the distal radio-ulnar joint during pronation and supination and must withstand considerable forces. Its distal ulnar surface also stabilizes the carpus and the hand. Stable fixation of distal ulna fractures ensures the congruence of the articulations and allows the early mobilisation of the wrist.




The head and neck of the distal ulna are often anatomically small and narrow. The slim, low profile design of the APTUS plates conforms well, while providing the necessary strength and stability. The plate design allows both a lateral (ulnar) as well as a volar or dorsal plate position.

Plate Features

- TriLock – multidirectional ($\pm 15^\circ$) and angular stable locking technology
- Uniform screw size $\varnothing 2.5$ mm
- Plate thickness 1.6 mm and Titanium Grade 4 for high strength
- Anatomic plate design is easily contoured
- Compatible with screws and instruments of the APTUS Radius System 2.5



Surgical Benefits

- Up to three screws capture and stabilize distal fragments
- Plate position can be either lateral (ulnar), volar or dorsal
- Low plate profile for minimal soft tissue irritation
- Two plate lengths to address fractures of the ulnar head and neck as well as of the distal shaft

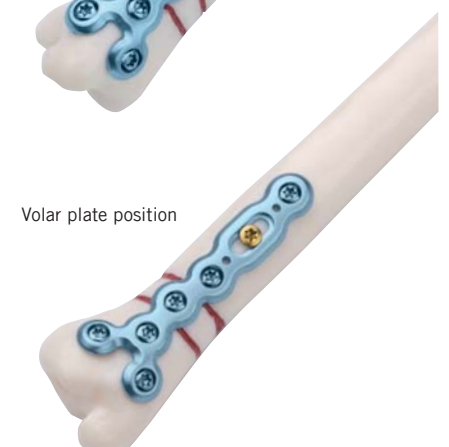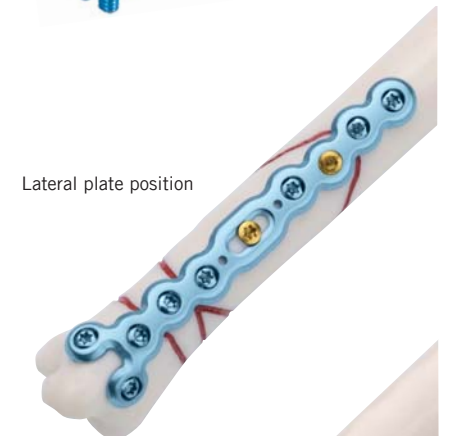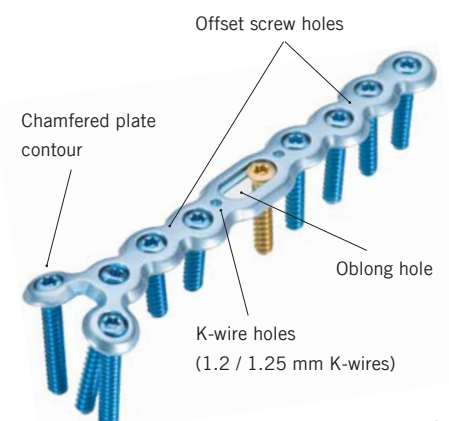

TRILOCK LOCKING TECHNOLOGY


- Secure, angular stable locking of the screw in the plate
 - o Spherical three-point wedge-locking
 - o Friction locking through radial bracing of the screw head in the plate – without additional tensioning components
- Screws can pivot freely by $\pm 15^\circ$ in all directions for optimal positioning
- Intra-operative fine adjustable
- TriLock screws can be re-locked in the same plate hole under individual angles up to three times
- Minimal screw head protrusion thanks to submerged locking contour
- No cold welding between plate and screws

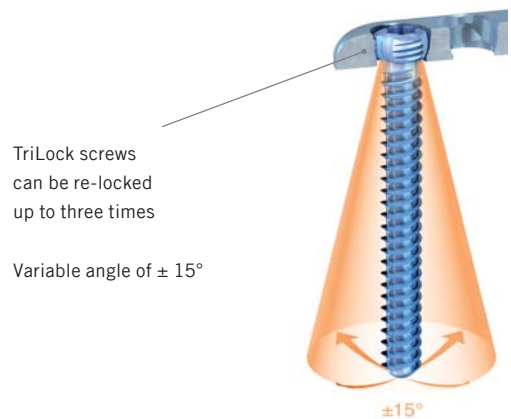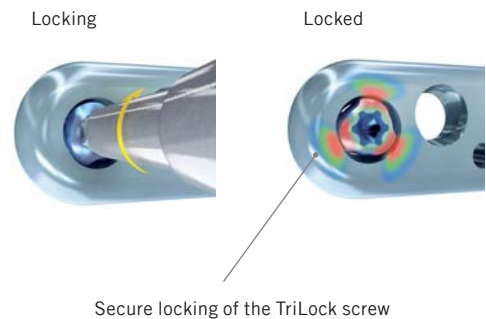

Ordering Information

2.5 TriLock Plates

Material: Titanium (ASTM F67)
 Plate thickness: 1.6 mm

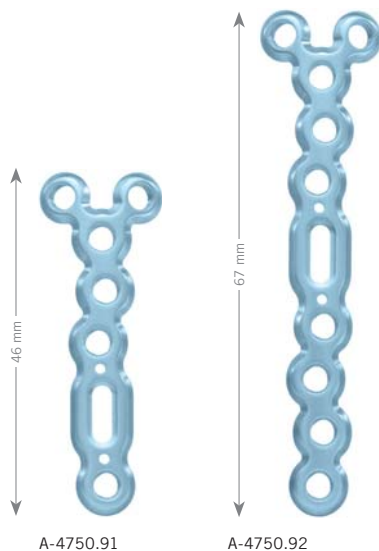

Art. No.	Description	Holes	Piece per Pack
A-4750.91	Y	7 (2/5)	1
A-4750.92	Y	10 (2/8)	1

The plates are compatible with all screws and instruments of the distal radius system 2.5.

WRIST-07000001_v0 / © 09.2010, Medartis AG, Switzerland. All technical data subject to alteration.

HEADQUARTERS/ SWITZERLAND	Medartis AG Hochbergerstrasse 60E 4057 Basel/Switzerland P +41 61 633 34 34 F +41 61 633 34 00 www.medartis.com
AUSTRALIA	Medartis Australia & New Zealand Pty Ltd Unit 6, 10 Hudson Road PO Box 111 Albion Qld 4010, Australia P 1300 858 853 P ^{int} +61 7 3326 8700 F 1300 854 665 F ^{int} +61 7 3862 2665
AUSTRIA	Medartis GmbH Twin Tower Wienerbergstrasse 11/12a A-1100 Wien P +43 1 99460 6499 F +43 1 99460 6498
FRANCE	Medartis S.A.R.L. Domaine d'Entreprises 29, rue Condorcet F-38090 Vaulx Milieu P +33 474 99 94 14 F +33 474 99 00 19
GERMANY	Medartis GmbH Am Gansacker 10 D-79224 Umkirch P +49 7665 98 24 0 F +49 7665 98 24 10
MEXICO	Medartis S.A. de C.V. Av. Presidente Masaryk 111 Piso 1 Col. Chapultepec Morales Del. Miguel Hidalgo MEX-11560, México, D.F. P (+52 55) 3300 6054 F (+52 55) 3300 6006
NEW ZEALAND	Medartis New Zealand Ltd PO Box 28461 Remuera Auckland, 1541 New Zealand P 0800 548 001 P ^{int} +64 9 909 0416 F 0800 548 002 F ^{int} +64 9 909 0419
POLAND	Medartis Sp. z o.o ul. Sokolnicza 5/29 PL-53676 Wrocław P +48 71 359 56 18 F +48 71 359 56 15
UNITED KINGDOM	Medartis Ltd. Batley Business Park Suite 63, Annexe 4 Technology Drive, Batley West Yorkshire, WF17 6ER United Kingdom P +44 (0)1924 476699 F +44 (0)1924 472000
USA	Medartis Inc. 127 W. Street Rd, Suite 203 Kennett Square, PA 19348 USA P +1 610 961 6101 Toll free 877 406 BONE (2663) F +1 610 961 6108